
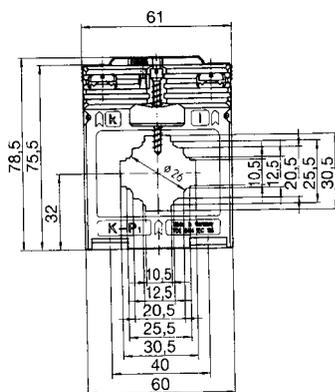

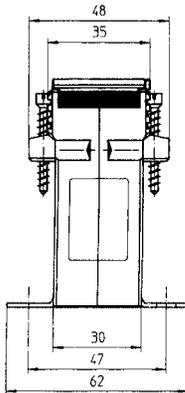



EASK 31.3

Aufsteck-Stromwandler

zugelassener Verrechnungs-Stromwandler

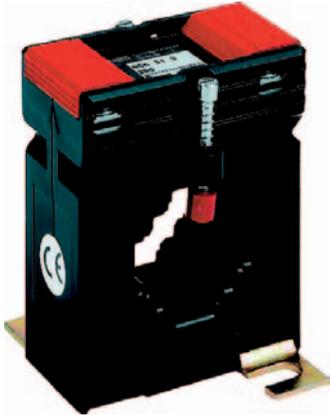

Sekundärstrom		5A		
Primär-Strom A	Bem.-Leist. VA	Genauigkeitsklasse		
		0,5 Best.-Nr.	0,5s Best.-Nr.	0,2 Best.-Nr.
100	1,5	7533	7555	7511
	2,5	7534	7556	
150	1,5	7535	7557	7513
	2,5	7536	7558	
200	2,5	7537	7559	7515
	5	7538	7560	7516
250	2,5	7539	7561	7517
	5	7540	7562	7518
300	2,5	7541	7563	7519
	5	7542	7564	7520
400	2,5	7543	7565	7521
	5	7544	7566	7522
500	2,5	7546	7568	7524
	5	7547	7569	7525
600	2,5	7549	7571	7527
	5	7550	7572	7528
750	2,5	7552	7574	7530
	5	7553	7575	7531



Schnappbefestigung

Primärleiter	30 x 10 mm 2 x 20 x 10 mm
Rundleiter	Ø 26 mm
Wandlerbreite	61 mm
Schnappbefestigung	Best.-Nr. 53011 siehe Seite 194
Plombierplatte	Best.-Nr. 59040 siehe Seite 195
Industrie-Stromwandler	siehe Seite 39