
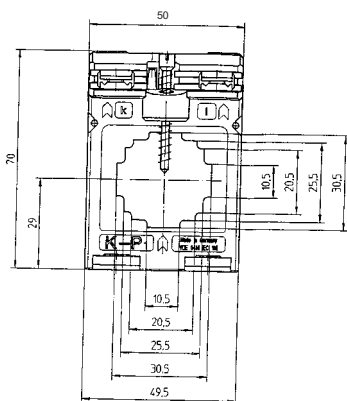



ASK 231.5

Aufsteck-Stromwandler



Sekundärstrom		5A		1A	
Primär-Strom A	Bem.-Leist. VA	Genauigkeitsklasse		Genauigkeitsklasse	
		1	0,5	1	0,5
		Best.-Nr.	Best.-Nr.	Best.-Nr.	Best.-Nr.
50	1	92050		92250	
	1,25	92051		92251	
60	1	92052	92012	92252	92212
	1,25	92053		92253	
75	1,25	92054	92014	92254	92214
	2,5	92055		92255	
80	1,25	92056	92016	92256	92216
	2,5	92057	92017	92257	92217
	5	92058		92258	
100	1,5	92059	92018	92259	92218
	2,5	92060	92019	92260	92219
	5	92061		92261	
125	1,5	92062	92020	92262	92220
	2,5	92063	92021	92263	92221
	5	92064		92264	
150	1,5	92065	92023	92265	92223
	2,5	92066	92024	92266	92224
	5	92067	92025	92267	92225
200	2,5	92068	92026	92268	92226
	5	92069	92027	92269	92227
	10	92070		92270	
250	2,5	92071	92028	92271	92228
	5	92072	92029	92272	92229
	10	92073		92273	
300	2,5	92074	92030	92274	92230
	5	92075	92031	92275	92231
	10	92076		92276	
400	2,5	92077	92032	92277	92232
	5	92078	92033	92278	92233
	10	92079	92034	92279	92234
	15	92080		92280	
500	2,5	92081	92035	92281	92235
	5	92082	92036	92282	92236
	10	92083	92037	92283	92237
	15	92084		92284	
600	2,5	92085	92038		
	5	92086	92039		
	10	92087	92040		
	15	92088			

Primärleiter	30 x 10 mm
Rundleiter	Ø 28,0 mm
Wandlerbreite	50 mm
Schnappbefestigung	-
Plombierplatte	-